



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ




RECEIVED
MAR 08 2001
Technology Center 2600

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subject the company to certain additional company law rules.

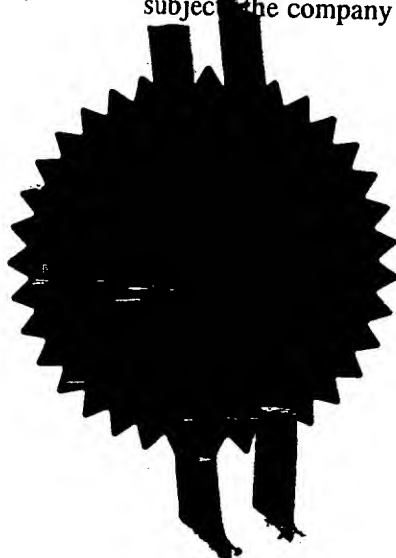

Signed

W. Evans


Dated 26 JAN 2001

RECEIVED
APR 10 2001
Technology Center 2100

CERTIFIED COPY OF
PRIORITY DOCUMENT

THIS PAGE BLANK (USPTO)

Patents Form 1/77
Patents Act 1977
(Rule 16)

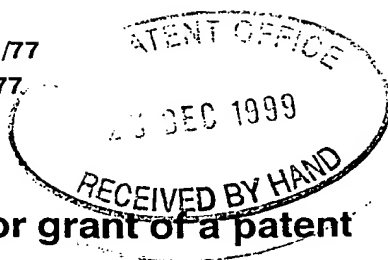

**The
Patent
Office**

29DEC99 5501689-6 D02917
P01/7700 1200 9930496.6

RECEIVED
MAR 18 2001

Technology Center 2600
The Patent Office
Cardiff Road
Newport
Gwent NP9 1RH

Request for grant of a patent

1. Your reference

5326601/JDC

2.

Patent No.

9930496.6

23 DEC 1999

3.

Full name, address and postcode of the or of each applicant (*underline all surnames*)

Mitel Corporation
350 Legget Drive
P.O. Box 13089
Kanata
Ontario
~~K2K 1X3~~
Canada

K2K 2W7
ALL 27/1/00
JERB

[Handwritten signature]
607630006

Patents ADP number (*if known*)

If the applicant is a corporate body, give the
country/state of its incorporation

Country: Canada
State: Ontario

4.

Title of the invention

COMMUNICATION SYSTEM ARCHITECTURE FOR VOICE FIRST COLLABORATION

5.

Name of agent

Beresford & Co

"Address for Service" in the United Kingdom
to which all correspondence should be sent

**2/5 Warwick Court
High Holborn
London WC1R 5DJ**

Patents ADP number

1826001

6.

Priority details

Country

Priority application number

Date of filing

Patents Form 1/77

7. If this application is divided or otherwise derived from an earlier UK application give details

Number of earlier application

Date of filing

8. Is a statement of inventorship and or right to grant of a patent required in support of this request?

YES

9. Enter the number of sheets for any of the following items you are filing with this form.

Continuation sheets of this form

Description 8

Claim(s) 3

Abstract 1

Drawing(s) 44 16

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and
right to grant of a patent (*Patents form 7/77*) THREE


Request for preliminary examination
and search (*Patents Form 9/77*) ONE

Request for Substantive Examination
(*Patents Form 10/77*)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application

Signature


BERESFORD & Co

Date 23 December 1999

12. Name and daytime telephone number of
person to contact in the United Kingdom

Dr John Collins

Tel: 0171-831-2290



The
Patent
Office

RECEIVED
MAR 08 2001
Technology Center 2600

The Patent Office
Cardiff Road
Newport
Gwent NP9 1RH

Statement of inventorship and of right to grant of a patent

1. Your reference 5326601/JDC

2. Patent Application Number **9930496.6** Application reference 5326601 **23 DEC 1999**

3. Full name of the or each applicant
Mitel Corporation

4. Title of the invention
COMMUNICATION SYSTEM ARCHITECTURE FOR VOICE
FIRST COLLABORATION

5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent
BY VIRTUE OF EMPLOYMENT

6. How many, if any additional Patents Forms
7/77 are attached to this form?

7. I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are the
inventor(s) of the invention which the above patent application relates to.

Signature

Beresford & Co
BERESFORD & Co

Date 23 December 1999

8. Name and daytime telephone number of
person to contact in the United Kingdom

Dr John Collins

Tel: 0171-831-2290

Patents Form 7/77

Graham H THOMPSON
1825 March Road
Kanata
Ontario
K2K 1X7
Canada

7053176001

Ashok GANESAN
2881 Richmond Road, Suite 315
Ottawa
Ontario
K2B 8J5
Canada

7866524001

COMMUNICATION SYSTEM ARCHITECTURE FOR VOICE FIRST COLLABORATION

FIELD OF THE INVENTION

5 This invention relates in general to network implemented shared workspace environments, and more specifically to an apparatus and method for spontaneously setting up, between physically distant individuals, a collaborative work-sharing environment.

BACKGROUND OF THE INVENTION

10 Well known examples of collaborative work-share environments include video conferencing; document sharing (read only or write access); and shared "whiteboard" systems. The majority of videoconference meetings are currently implemented using expensive, dedicated equipment such as manufactured by PictureTel™. Typically, such equipment provides not only video conferencing, but also other virtual co-location tools.
15 Because of its cost and size, this equipment is typically located in a dedicated "videoconference room", rather than at individual users' desktops. Such systems are used, primarily, as a means of reducing operating costs, such as air travel for the purpose of conducting face-to-face meetings.

Recently, much more economical, PC-based products have been introduced to the
20 market. Examples of current products that can be used to create a shared working environment include Intel Corporation's ProShare™ and Microsoft Corporation's NetMeeting™. These PC-based products are relatively low cost (in some cases free of charge) and are sufficiently small as to enable mass deployment on every networked PC of an enterprise LAN. Unlike dedicated conference room equipment, PC-based products can be
25 viewed as workplace enhancements, providing added value to personal communications, rather than as tools for corporate cost reduction.

In spite of the cost and space advantages of PC-based systems over prior art dedicated conferencing facilities, the PC-based products are difficult to use, especially for the majority of users who have no technical background or training. Setting up a collaborative session
30 using existing PC-based technology typically involves cumbersome setup processes, including establishing IP-addresses, launching software etc, and are often scheduled for a date and time subsequent to the telephone discussion in which the parties agree to conduct the video conference. Furthermore, during the actual setup process, no intrinsic voice

communications path exists between the parties involved. Voice communication can not take place until the setup process is complete. Using current technology, it is not uncommon for the parties to make a regular phone call in order to talk through the setup process.

5 SUMMARY OF THE INVENTION

According to the present invention, a system is provided for initiating a collaborative work-share environment between two or more parties to a telephone call, without complex and time consuming setup processes as are common in the prior art. In accordance with the preferred embodiment, each party to a telephone call is provided with a collaboration button
10 and an indicator on their telephone set. When the indicator is illuminated, the system is capable of establishing a work-share environment. In response to one of the parties activating the collaboration button, the system causes network enabled applications to run on the individual users' desktop computers so that the parties are able to share information between themselves, conduct a video conference, etc., while maintaining their initial voice connection.

15 Thus, the telephone is used in the usual way to make regular, voice-only, telephone calls. Once a call is established, the telephones communicate with each other to determine if they each are associated with equipment which would allow richer collaboration between their respective users. If such equipment is available then the indicator on at least one of the telephones is lit, indicating that richer collaboration is possible. If the talking parties decide
20 that they would like to share a document or set up a video conference, this may be initiated by either party pushing the collaboration button.

Once the button has been pushed, one of a number of subsequent scenarios are possible. In all cases, from a user perspective, the voice path is unaffected and the talking parties may continue uninterrupted conversation.

25 Some implementation examples are set forth below, without limitation to the scope of the invention. In its broadest aspects, the present invention is a method and apparatus for simple spontaneous setup of a shared workspace.

BRIEF DESCRIPTION OF THE DRAWINGS

30 A preferred embodiment of the present invention is described herein below with reference to the drawings in which:

Figure 1 is a diagram illustrating a preferred station arrangement including a telephone and a desktop PC, both of which are connected to a LAN;

Figure 2 shows the overall architecture of the system according to the preferred embodiment;

Figure 3 is a flowchart showing steps in a call setup according to the method of the present invention;

5 Figure 4 is a flowchart showing steps for indicating at a telephone set availability of network collaboration between multiple parties following call setup;

Figure 5 is a flowchart showing steps for ceasing the indication of network collaboration availability when the call between multiple parties is being torn down;

Figure 6 is a flowchart showing steps for implementing network collaboration
10 between multiple parties according to the invention; and

Figure 7 shows a generalized architecture of the system according to the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to Figure 1, the preferred station arrangement comprises a telephone 1 and a
15 PC 3, both of which are connected to a LAN 5 (Local Area Network). The telephone 1 is a component of an IP (Internet Protocol) based PBX system. In such a system, telephones, PBX hardware components, PCs and other data systems are interconnected via the LAN 5.

Critical user interface characteristics of the telephone 1 include a collaborate indicator 7, which can be in the form of an LED or other suitable visual indicator, and a collaborate
20 button 9. The collaborate indicator 7 signals to the user that the party (or at least one party in a multiparty call) has the capability of collaborating with the user. The user may operate the collaborate button 9 if he or she wishes to run a collaboration application.

The term "collaboration", as used in this specification, refers to one of a number of desktop collaboration application programs, excluding voice, which allow for enhanced
25 communication between one or more people via their desktop computers (PCs). The term "virtual co-location" will be used to describe the capability of these applications. Such applications typically run on the PC 3 at a user's desktop, or at least have their user interfaces on the desktop PC 3. Examples of such applications include video conferencing; multiple viewing access via remote PCs to a single document; PC based joint document editing;
30 network "white boarding", etc. The operation of these collaboration application programs is beyond the scope of this specification although the structure and operation thereof would be well known to a person of ordinary skill in the art.

A collaboration control program runs on each PC 3 associated with a telephone 1.

This program has the capability of communicating over the LAN 5 with the phone 1 to control the collaborate indicator 7 and sense actuation of the collaborate button 9. The

collaboration control program includes a list of all collaboration application programs

5 installed which have been registered with the collaboration control program on the PC 3,

including information about their capabilities and communication protocols (e.g. H.323). The

collaboration control program has the capability of launching a collaboration application

program, or, in the event that it is already running in the background, to bring the

collaboration application program to the foreground. This is accomplished using well known

10 capabilities of the PC Operating System.

The collaboration control program also has the ability to communicate with the

collaboration control programs of remote PCs via the LAN 5. It has the capability to request

(or respond to a request for) a list of collaboration application programs from a remote PC via

the PC's Operating System. Finally, it has the capability to compare remote and local

15 collaboration application programs and, by comparing supported protocols, determine

whether the mutual collaboration application programs can inter-operate in a shared work

environment.

With reference to Figure 2, two similar stations ("Station 1" and "Station 2"), of the variety shown in Figure 1, are interconnected over the LAN 5 and are supported by a

20 common call control unit 11 for implementing various telephony applications. Operation of

the call control unit 11 is beyond the scope of this disclosure, although the structure and

operation thereof would be well known to a person of ordinary skill in the art. The call

control unit 11 includes a plurality of Phone Proxies (software objects), respective ones of

which are associated with telephones registered to the system. Each Phone Proxy maintains

25 the call state for an associated telephone and includes a database containing both the

telephone Number and IP Address of the phone as well as the IP address of any PC associated

with the Phone (i.e. on the same user's desktop). This IP address is typically registered once,

at the time of system installation.

Figure 3 illustrates only the basic steps of a call setup, call progress tone generation

30 (dial, ringback, busy) having been omitted for ease of explanation. Also, normal call control

exceptions (e.g. Called Party Busy, No Answer, etc.), and error handling routines, have also

been omitted. The terms "Phone-1" and "Phone-2" refer to combinations of specific

telephone hardware and associated control software proxies, wherein Phone-1 is the calling

party and Phone-2 is the called party. After Phone-1 goes off-hook and the caller dials the number of the party at Phone-2, Phone-1 sends the dialed digits to the Phone-1 Proxy running in Call Control Unit 11. Once the Proxy recognizes the dialed number, the Phone-1 Proxy then initiates call setup with Phone-2. Once Phone-2 goes off-hook, the Phone Proxy(s) send the IP address of the Phone-2 voice port to Phone-1, and vice versa, thereby enabling the phones to establish duplex voice paths, and the call is completed.

Initial setup of the collaborate indicator 7 is initiated by a Call Completed event as set forth above. The Call Complete event indicates that calling and called parties to an IP voice session are "connected". In general, this event occurs at both the calling and called party Phone Proxies, and again if additional parties are added to build a voice conference.

As shown in Figure 4, if both parties each have at least one common collaboration application program supporting at least one protocol in common then the collaborate indicator 7 is illuminated. Conversely, if the parties do not share a collaboration application program in common, or the situation is indeterminate, the collaborate indicator 7 will not be illuminated. Following a Call Completed event (or multiple Call Complete events if there are multiple parties to the call), the Phone-1 Proxy notifies the collaboration control program running in PC 3 of the IP address of Phone-2, and requests the IP address of its associated PC. Once Phone-2 responds with the requested IP address, the collaborate control program in the PC associated with Phone-1 requests information on collaboration application programs supported by the PC of Phone-2. More, particularly, Phone-1 requests the list of collaboration application programs maintained by the collaboration control program in PC 3 associated with Phone-2. Once that information has been received, the local collaborate control program compares its list of supported application programs with those supported by the remote PC and, in the event of at least one match, sends a message to Phone-1 to illuminate the collaborate indicator 7.

A tear-down process occurs in the event of one party hanging-up on the call (multiple hang-up events occurring in the event of a multi-party conference), as shown in Figure 5. The phone used by the party which is hanging up notifies Phone-1 of the Hang-up event. Phone-1 then notifies the collaborate control program of the Hang-up event. The collaborate control program determines whether any of the remaining parties to the call can collaborate, in which case the collaborate indicators remain illuminated. If there are no remaining parties capable of collaboration, or if Phone-1 hangs up, then the collaborate control program for Phone-1 sends a message to extinguish the collaborate indicator 7 at Phone-1. Thus, the collaborate indicator

7 remains illuminated provided that at least one other party remains in the call with the capability to collaborate with the initiating telephone (Phone-1).

Operation of the collaborate button 9 is set forth with reference to Figure 6, from which it will be noted that the button takes no action unless the collaborate indicator 7 is lit.

5 In response to user actuation of button 9, Phone-1 notifies its associated collaborate control program. If the local indicator 7 is extinguished, then no further action is taken. The step "Phone-1 CI lit?", may be omitted in response to user selection. If the local indicator 7 is illuminated, the collaborate control program determines whether there is more than one collaboration application program available. If not, then the collaborate control program
10 launches or brings the collaboration application to the foreground at the user's desktop. A similar message may be sent to the collaborate control program at the remote party so that the collaborating applications launch simultaneously. If more than one collaboration application program is available, then a dialog box is displayed at the user's desktop PC 3 listing the collaboration applications available. Once the user selects an application, program flow
15 returns to the collaborate control program for launching the application.

Referring to Figure 7, a general architecture is presented wherein the LAN is generalized to include the Internet 13. In this case, Station 1 and Station 2 can be located anywhere geographically provided that they have Internet, or other network access. Non-Internet communications terminals (e.g. terminals located at a private home) are represented
20 by Station 3 and Station 4.

Station 3 is illustrated as a PC with multimedia microphone and speakers and running an IP telephony protocol supported by an Internet Service Provider 15. Interconnection to the ISP is via the PSTN (Public Switched telephone Network) using an arbitrary protocol (e.g. IP / PPP / 33.6 Modem or ISDN BRI). In this scenario, the function of the collaboration control
25 program may be performed either by the ISP 15 or the PC in Station 3. If Station 1 calls Station 3, it will respond provided that it is running H.245 or other suitable protocol.

Station 4 is shown implementing a Plain Old telephone Service (POTS) termination. Station 1 can communicate with Station 4 via a PSTN gateway 17, in a well known manner. The gateway 17 may or may not respond to a collaboration control program request from
30 Station 1. In any event, the collaboration control program of Station 1 will not recognize collaborative capabilities and the collaborate indicator of Station 1 therefore remains un-illuminated.

FAX is, arguably, the third most pervasive form of collaboration (face-to-face communication and telephone communication being the first and second most pervasive, respectively). Thus, as an alternative Station 3 and/or Station 4 of Figure 7 may have associated FAX applications ranging from a FAX machine to FAX emulation software. In this case, it is preferred that Station 3 or the ISP 15 and PSTN gateway 17 be implemented in such a way as to respond to a capabilities query by indicating FAX capability. Similarly it is preferred that collaboration application program suite on Stations 1 and 2 include FAX capability.

Numerous alternatives and variants of the invention are possible.

Some or all of the functions described herein as being implemented via the call control unit phone proxies may be implemented physically within each telephone 1 (e.g. via a H.323 IP Phone).

Rather than using separate connections from phone 1 to LAN 5 and PC 3 to LAN 5, alternative "one wire to the desktop" configurations may be adopted. In one embodiment, the phone 1 is connected directly to the LAN 5 and the PC 3 is connected to phone 1, such that the phone 1 routes or switches PC data streams to/from the LAN 5. In the second embodiment, the PC 3 is connected directly to the LAN 5 and the phone is plugged into the PC 3, such that the PC routes or switches phone voice traffic to/from the LAN (i.e. the telephone is a PC peripheral).

It is possible to implement either the collaborate indicator 7 or the collaborate button 9 (or both) on the PC 3. For example, the collaborate indicator 7 could simply be part of an application user interface and the collaborate button 9 could be either a soft button activated with the mouse or a "function" key on the PC keyboard (i.e. similar to a client-server architecture).

The system described herein employs an identifiable call control unit 11 (e.g. Server PC). It is equally possible that the invention may be applied in a peer-to-peer architecture, (e.g. employing H.323 protocol).

The foregoing description refers mainly to two-party collaboration, however the method of this invention is applicable, with minor modifications, to multiparty collaboration.

The preferred deployment of this invention is in a system in which telephone (voice) transport is effected via the data network (e.g. using a corporate LAN, WAN, or the Internet). However, such is not a requirement for realizing the invention which, it is contemplated, could in principle be implemented on top of dedicated telephone (e.g. PBX, PSTN, ISDN),

with data systems to connect telephone and PC at the desktop. The telephone 1 and PC 3 may or may not be physically connected at the desktop. Further architectural detail of this implementation are not described but would be well known to a person of ordinary skill in the art.

The present invention can be implemented by remote computers connected over a network. Although the embodiment described hereinabove has been described with reference to a separate telephone, the telephone equipment can be integrated within the computer and the indicator and collaborative button can be provided by an input device of the computer e.g. a keyboard. The voice capability of the telephone can be provided by a microphone input into the computer as is well known in the art.

Since the present invention can be implemented by a computer program operating on a computer, the present invention encompasses a computer program and any form of carrier medium which can carry the computer program e.g. a storage medium such as a floppy disk, CD ROM, programmable memory device, or magnetic tape, or a signal such as optical signal or an electrical signal carried over a network such as the Internet.

All such alternative embodiments and variations are believed to be within the scope of the invention as defined by the claims appended hereto.

What is claimed is:

1. A collaborative computer telephony system, comprising:
a communication network;

5 a plurality of integrated computer telephony devices connected to the network and identified by unique IP addresses, at least two of said integrated computer telephony devices supporting collaboration application programs;

an indicator on at least one of said integrated computer telephony devices; and

10 a collaborate control program associated with each of said at least two integrated computer telephony devices for detecting commonly supported ones of said collaboration application programs and in response activating said indicator.

2. The system of claim 1, further comprising a user input device on said at least one of said integrated computer telephony devices for launching said commonly supported ones of
15 said collaboration application programs in the event said indicator is activated.

3. The system of claim 1, wherein said network is a local area network.

4. The system of claim 1, wherein said network is the Internet.

20 5. The system of claim 1, wherein said collaboration application programs include video conferencing applications, fax applications, document sharing applications, and shared whiteboard applications.

25 6. The system of claim 1, wherein said integrated computer telephony devices each further comprise a telephone and a computer.

7. The system of claim 6, wherein said computer and telephone are each connected directly to the network.

30 8. The system of claim 6, wherein said computer is connected to said telephone which in turn is connected directly to the network.

9. The system of claim 6, wherein said telephone is connected to said computer which in turn is connected directly to the network.

10. The system of claim 6, wherein said indicator further comprises a light on said telephone and said user input device is a button on said telephone.

11. The system of claim 6, wherein said indicator and user input device further comprise a graphical user interface on said computer.

12. In a collaborative computer telephony system including a communication network, a plurality of telephones and associated computers connected to the network and identified by respective IP addresses, at least two of said computers supporting collaboration application programs, and an indicator on at least one of said telephones, a method for controlling said indicator comprising the steps of:

- 15 exchanging IP addresses of said at least two computers over said network;
- issuing a request from a first one of said computers to a second one of said computers for a list of said collaboration application programs supported by said second one of said computers;
- comparing said list with a further list of supported ones of said collaboration
- 20 application programs within said first computer; and
- activating said indicator at said first telephone in the event of at least one commonly supported ones of said collaboration application in said first and second ones of said computers.

13. Computer telephony apparatus for use in a collaborative computer telephony system comprising a communication network and a plurality of said terminals, said apparatus comprising:

5 indicator means for indicating that a collaborative session is set up with another computer telephony apparatus; and

 collaborative control means for detecting the presence of collaborative control means in said another
10 computer telephony apparatus and for activating said indicator means in response.

14. A computer program for controlling a computer to:

 receive a request for a collaborative session with
15 at least one second computer,

 issue a request to said at least one second computer over a network for a list of collaborative programs supported by said at least second computer;

 compare said list with a list of supported
20 collaboration programs within said computer; and

 issuing an activation signal to activate an indicator in the event that at least one collaborative program is commonly supported by said computer and said
at least one second computer.

25
15. A carrier medium carrying the computer program of claim 14.

COMMUNICATION SYSTEM ARCHITECTURE FOR
VOICE FIRST COLLABORATION

5 A collaborative computer telephony system, comprising a communication network; a plurality of integrated computer telephony devices connected to the network and identified by unique IP addresses, at least two of the integrated computer telephony devices supporting collaboration application programs; an indicator on at least one of the integrated computer telephony devices; and a collaborate control program associated with each of the integrated computer telephony devices for detecting commonly supported ones of the collaboration application programs and in response activating the indicator.

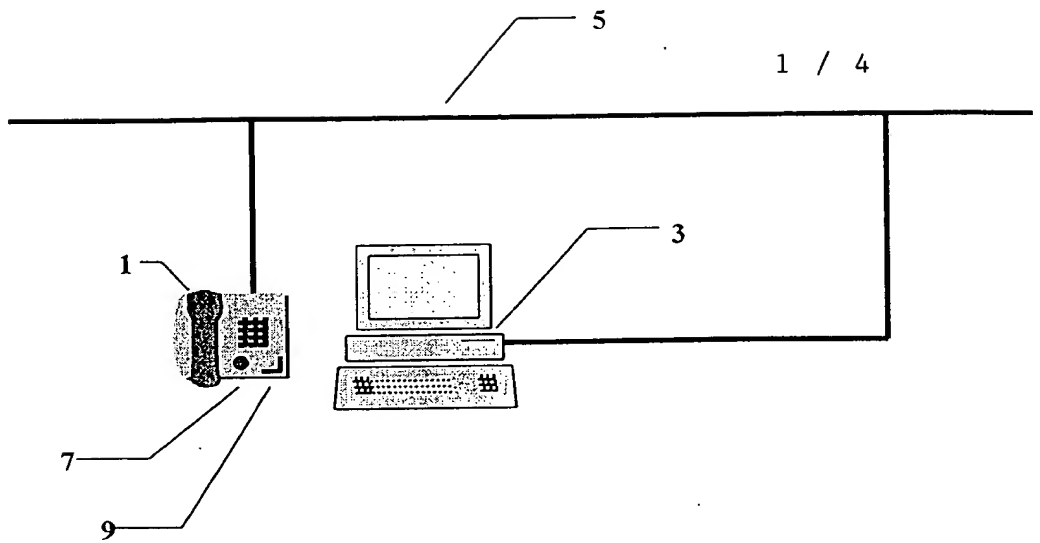


Figure 1

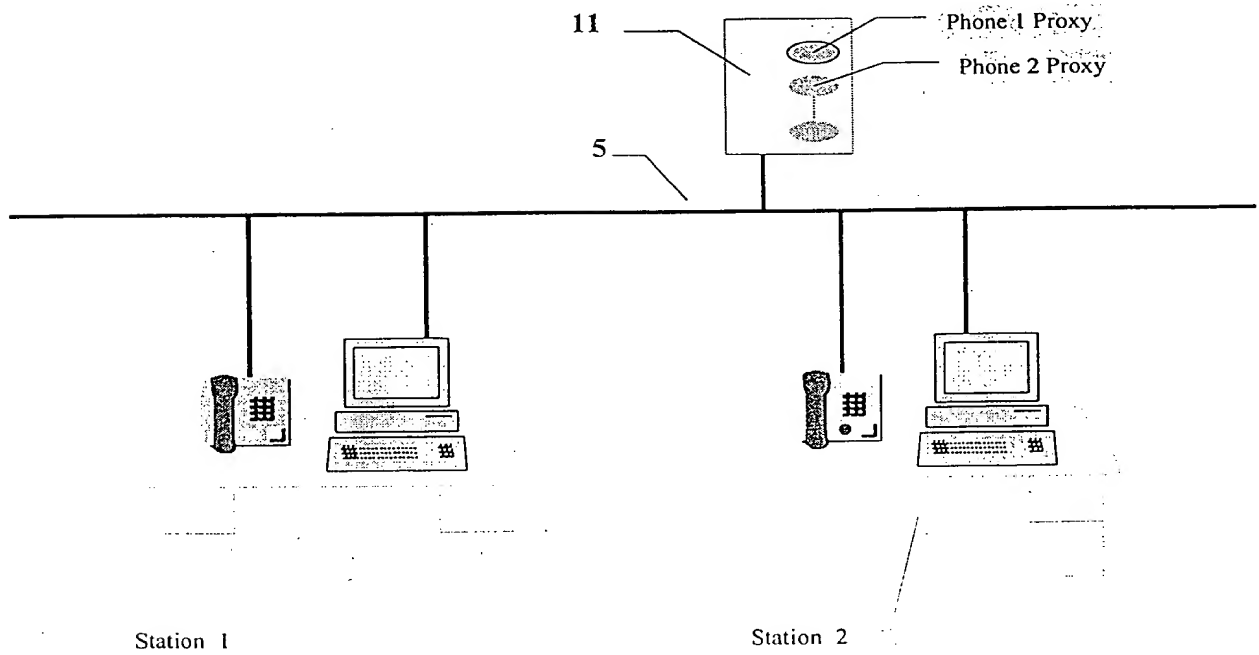


Figure 2

THIS PAGE BLANK (USPTO)

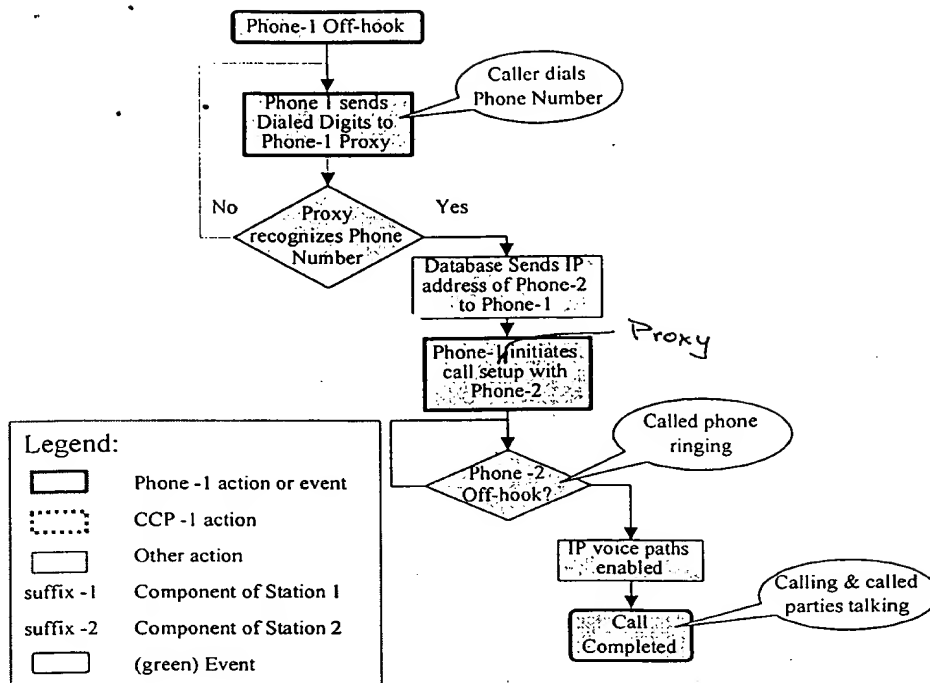


Figure 3


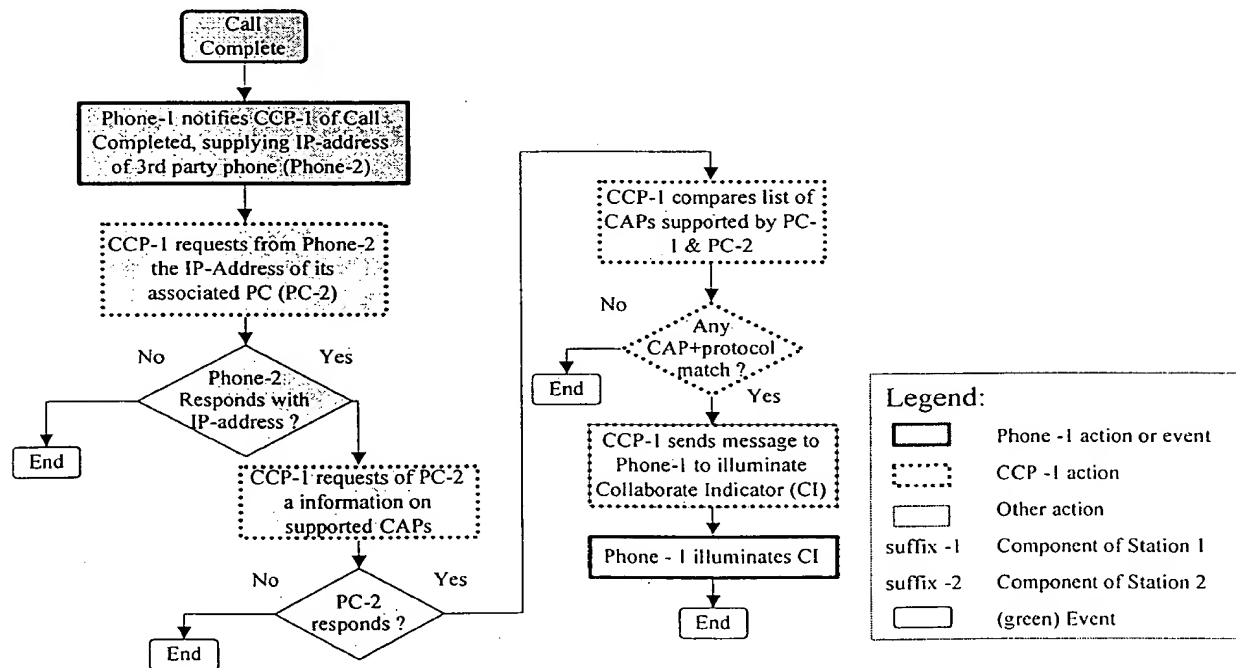


Figure 4


THIS PAGE BLANK (USPTO)

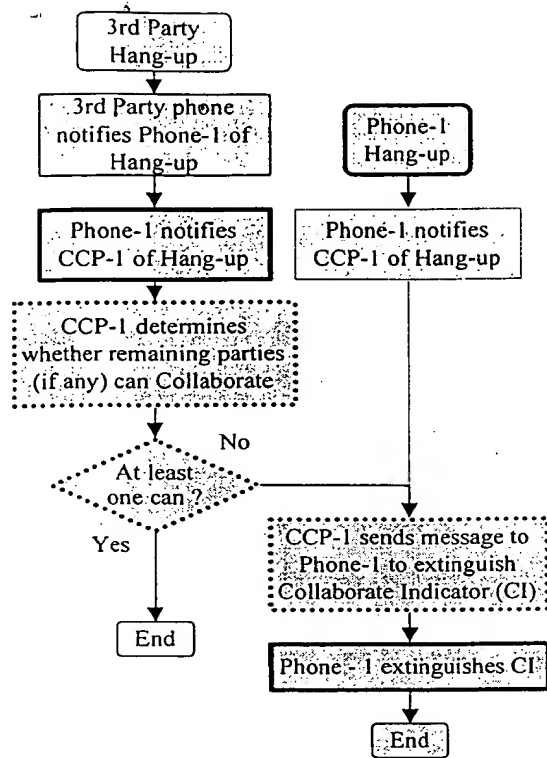

Legend:

- Phone -1 action or event
- CCP -1 action
- Other action
- suffix -1 Component of Station 1
- suffix -2 Component of Station 2
- (green) Event

Figure 5

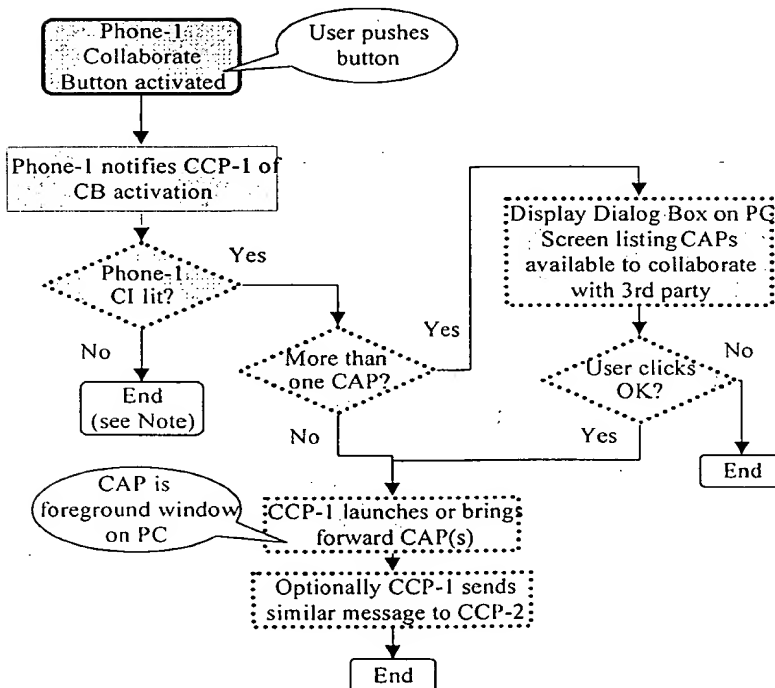

Legend:

- Phone -1 action or event
- CCP -1 action
- Other action
- suffix -1 Component of Station 1
- suffix -2 Component of Station 2
- (green) Event

Figure 6

THIS PAGE BLANK (USPTO)

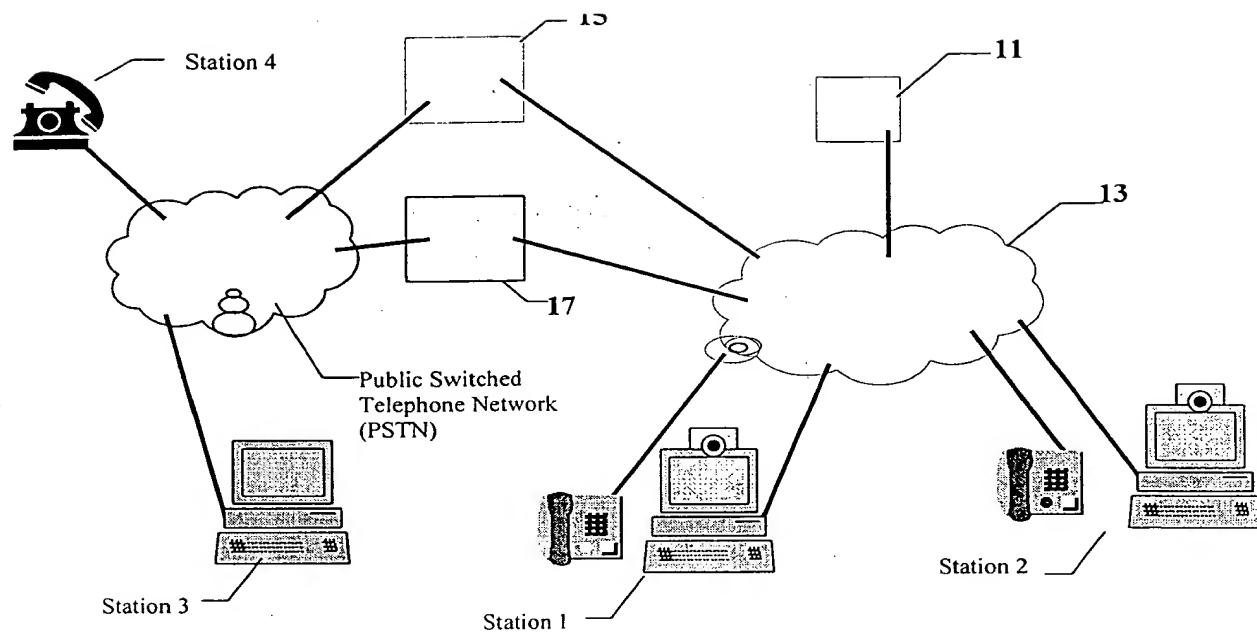


Figure 7

THIS PAGE BLANK (USPTO)